



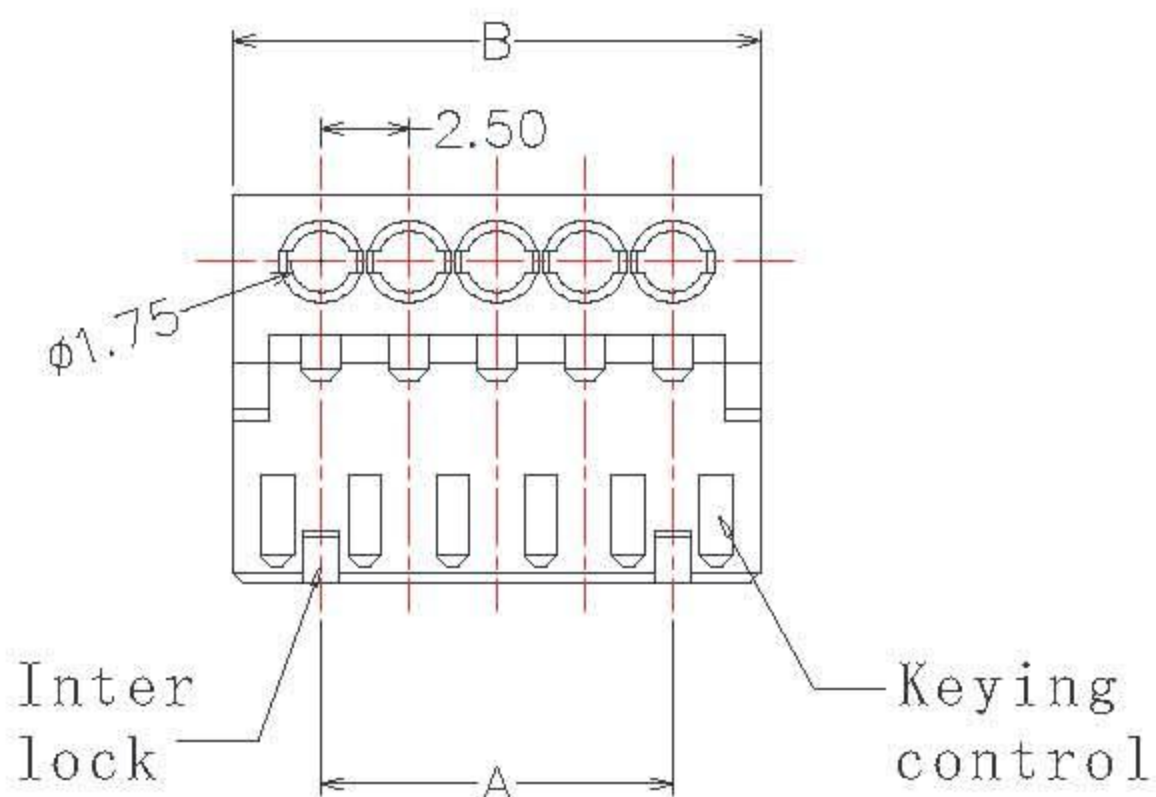







M7283

SPECIFICATION

Current rating: 3AAC, DC
 Voltage rating: 32VAC, DC
 Operating Temperature: -40 °C--+120 °C
 Contact Resistance: 10mΩ max.
 Insulation resistance: 1000MΩ min.
 Withstanding voltage: 1400V AC/minute
 Material: Housing:Nylon66 UL94V-0
 Terminal: Phosphor bronze, Tin-plated
 Wire range: AWG 24 to 22
 GWT:750 °C IEC-60335-1

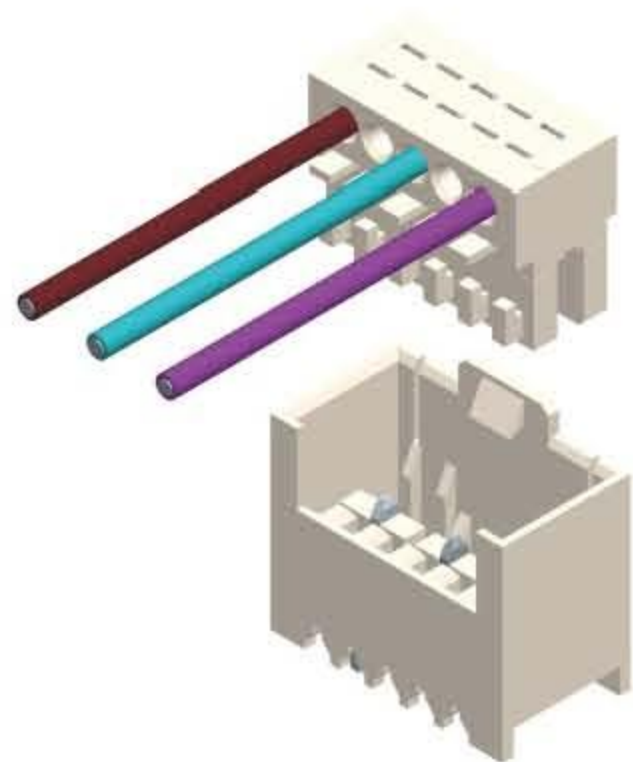

| Dimension | | |
|-----------|------|------|
| Pos. No. | A | B |
| 3 | 5.0 | 10.0 |
| 5 | 10.0 | 15.0 |
| 7 | 15.0 | 20.0 |
| 9 | 20.0 | 25.0 |
| 11 | 25.0 | 30.0 |
| 13 | 30.0 | 35.0 |
| 15 | 35.0 | 40.0 |
| 17 | 40.0 | 45.0 |
| 19 | 45.0 | 50.0 |

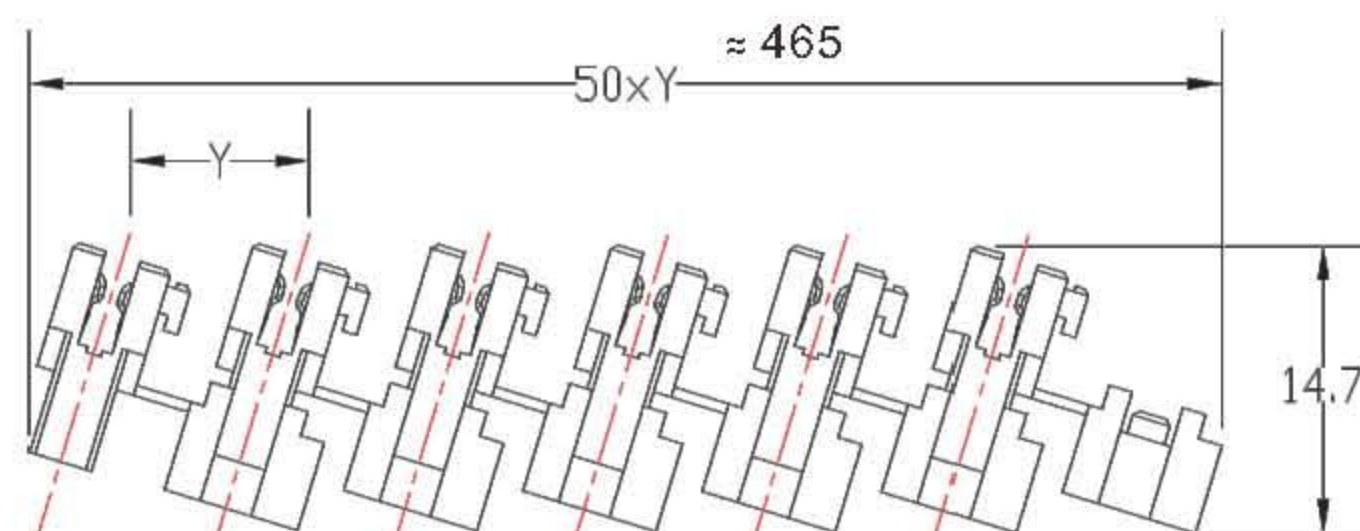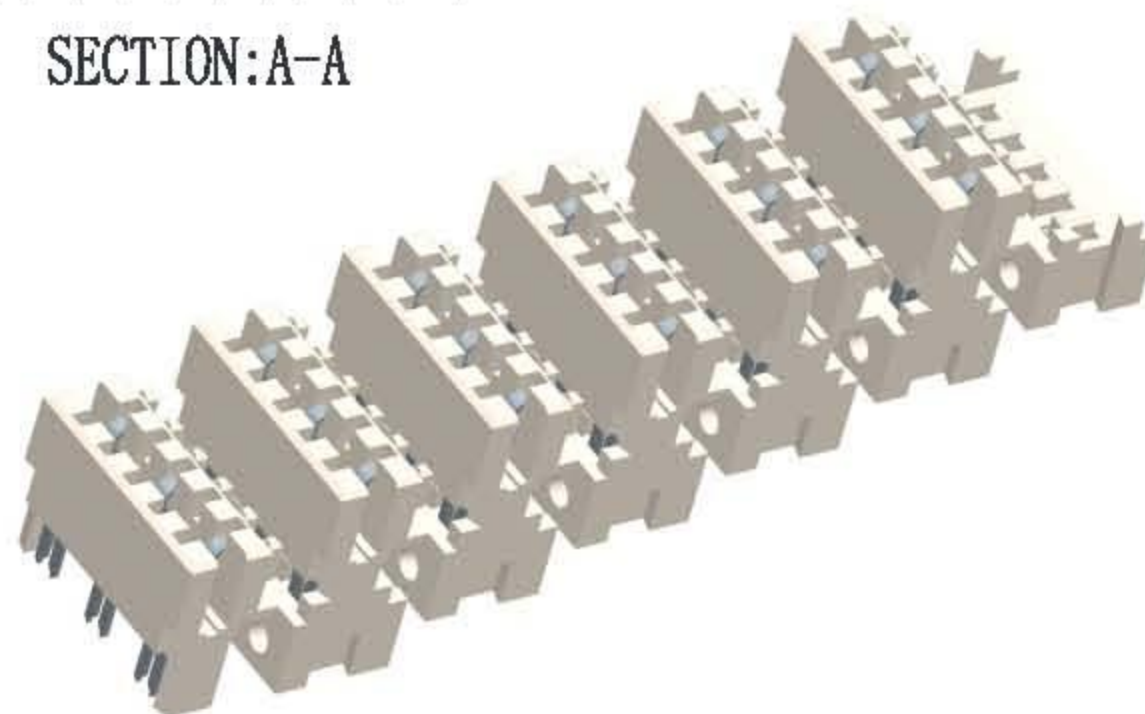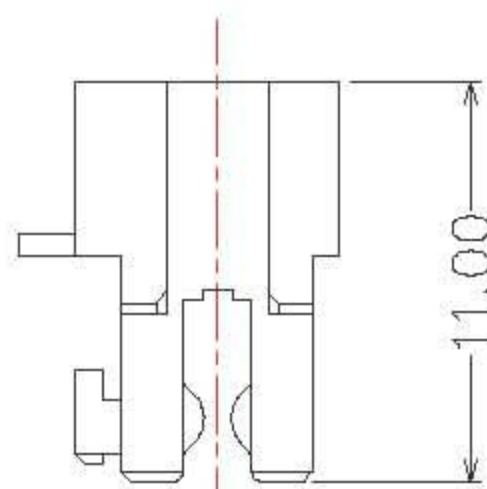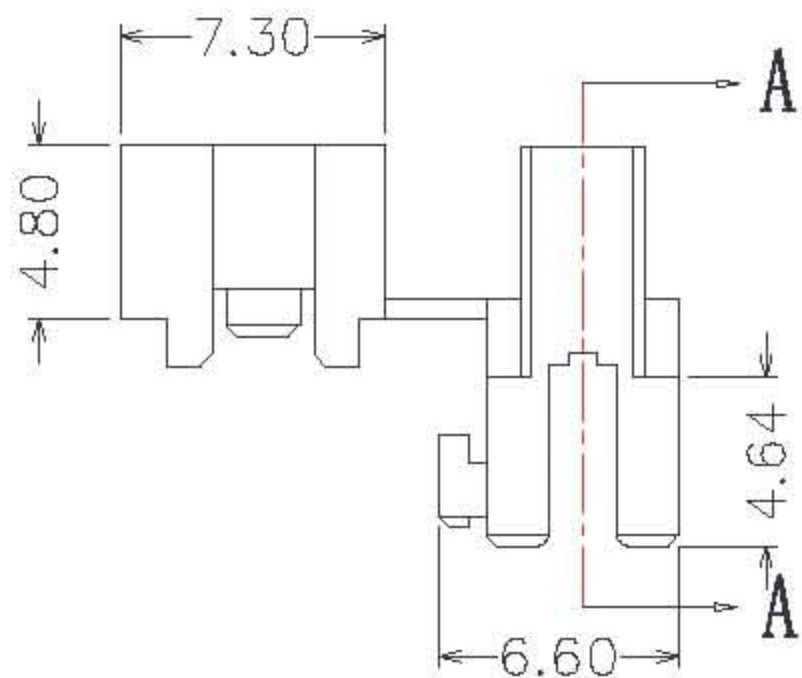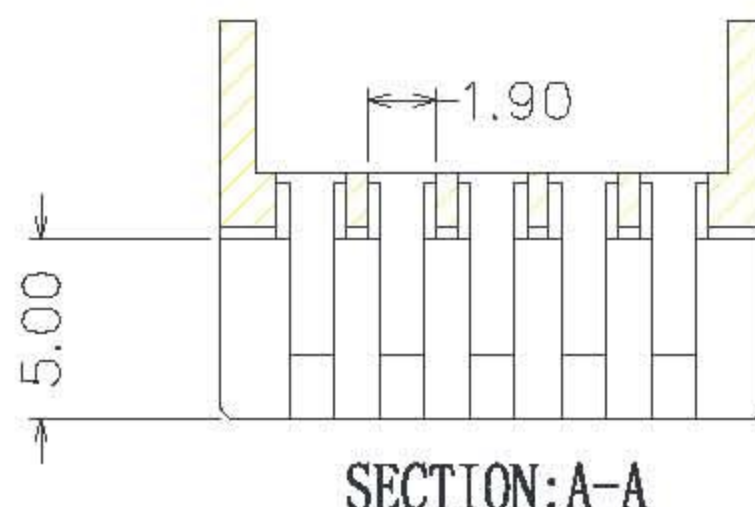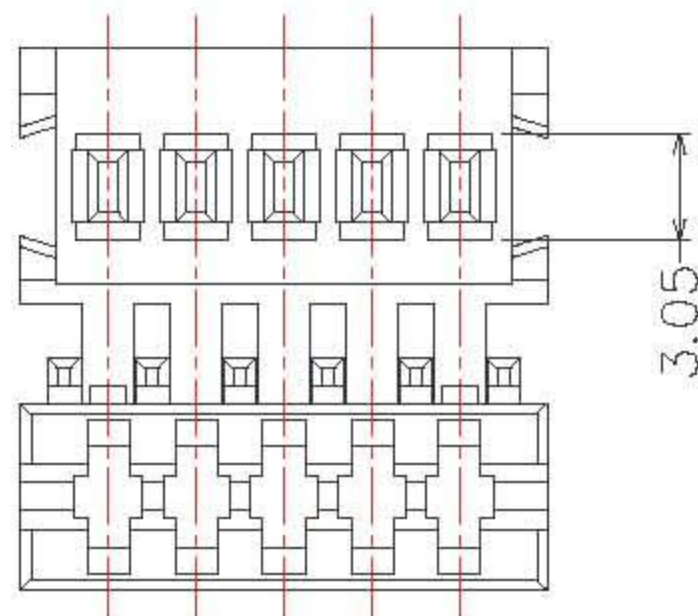

M7283 Part Number Definition

M7283-X-XXX-X(X)

