

3.96mm(.156")Wire To Wire And Wire To Board Connector




Shenzhen Hongru Connector Co., Ltd


Email: yukyli@hrb-connector.com
 Tel: 86-0755- 2709 6669
 Fax: 86-0755-2709 2392
 Skype: haiyuncheng-vivian
 Mobile(Whatsapp): 86-186 8112 3590
 Website: <http://www.hrb-connector.com>

SPECIFICATIONS:

- Current Rating:7AAC,DC
- Voltage Rating:600V AC,DC
- Operating Temperature:-40°C~+130°C
- Contact Resistance:3.0mΩ max.
- Insulation Resistance:5000MΩ Min.
- Withstanding Voltage:2200V AC/minute
- UL File No:E304945
- Material:Housing:Polyester UL94V-0
Pin:Brass,Bright Tin Plated

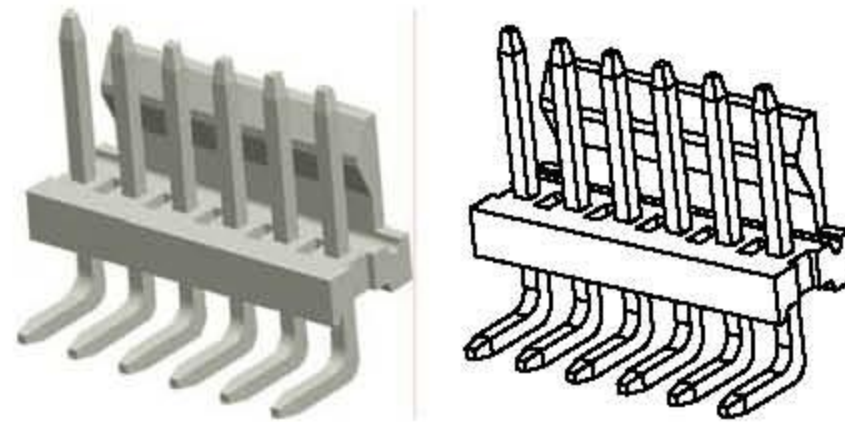

Standard Type

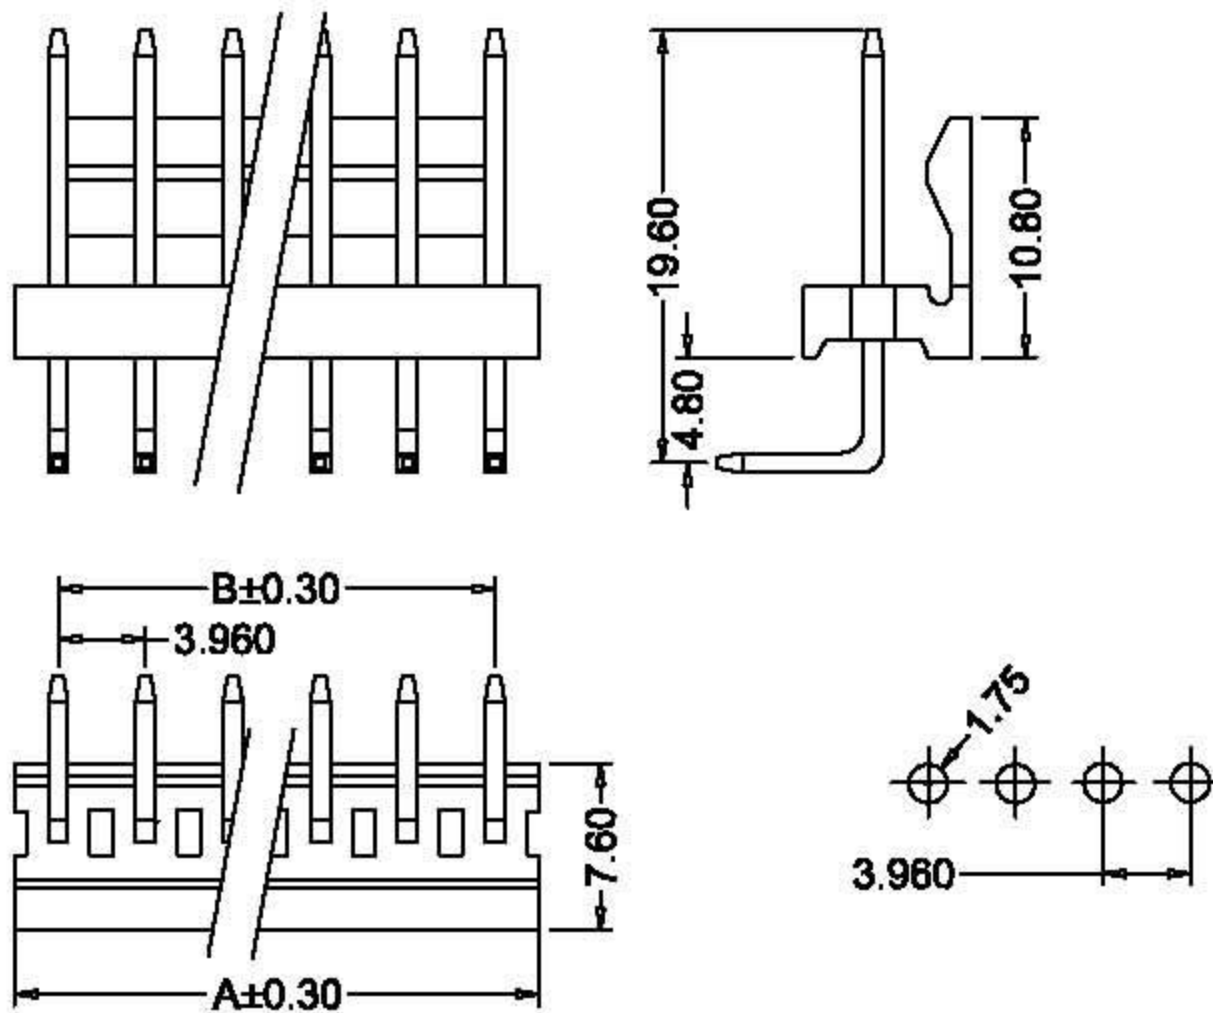

Ordering Information And Dimensions

| Part NO. | | Dimensions | | Part NO. | | Dimensions | | Part NO. | | Dimensions | |
|----------------|----------|------------|-------|-----------------|----------|------------|-------|-----------------|----------|------------|-------|
| TYP UL94V-0 | Circuits | Dim:A | Dim:B | TYP UL94V-0 | Circuits | Dim:A | Dim:B | TYP UL94V-0 | Circuits | Dim:A | Dim:B |
| M3965R-2-K (S) | 2 | 7.92 | 3.96 | M3965R-9-K (S) | 9 | 35.64 | 31.68 | M3965R-16-K (S) | 16 | 63.36 | 59.40 |
| M3965R-3-K (S) | 3 | 11.88 | 7.92 | M3965R-10-K (S) | 10 | 39.60 | 35.64 | M3965R-17-K (S) | 17 | 67.32 | 63.36 |
| M3965R-4-K (S) | 4 | 15.84 | 11.88 | M3965R-11-K (S) | 11 | 43.56 | 39.60 | M3965R-18-K (S) | 18 | 71.28 | 67.32 |
| M3965R-5-K (S) | 5 | 19.80 | 15.84 | M3965R-12-K (S) | 12 | 47.52 | 43.56 | M3965R-19-K (S) | 19 | 75.24 | 71.28 |
| M3965R-6-K (S) | 6 | 23.76 | 19.80 | M3965R-13-K (S) | 13 | 51.48 | 47.52 | M3965R-20-K (S) | 20 | 79.20 | 75.24 |
| M3965R-7-K (S) | 7 | 27.72 | 23.76 | M3965R-14-K (S) | 14 | 55.44 | 51.48 | | | | |
| M3965R-8-K (S) | 8 | 31.68 | 27.72 | M3965R-15-K (S) | 15 | 59.40 | 55.44 | | | | |

