

.187"Series Nylon-Insulated Male Merminal



Connector & Terminal

SPECIFICATIONS:

- Current Rating:AWG#22~#18 :10A AC,DC
AWG#16~#14 :15A AC,DC
- Voltage Rating:300V AC,DC
- Operating temperature:-25℃~+105℃
- Material:Housing:Nylon66 UL 94V-2
Terminal:Brass.Tin-plated
- Tab Size:4.75x0.80mm Or 4.75x0.50mm
- The insertion force And Male Terminal:7.8kg (max.)
- The withdrawal force And Male Terminal:3.0kg (Min.)
- Crimp tensile strength:AWG#22~#18:5.0kg (Min.)
AWG#16~#14:10.0kg (Min.)
- cULus File No:E322751

Shenzhen Hongru Connector Co., Ltd

Email:yukyli@hrb-connector.com






Tel: 86-0755 2709 6669

Fax: 86-0755 2709 2392

Skype: haiyuncheng-vivian


Mobile(whatsapp): 86-186 8112 3590

Website: http://www.hrb-connector.com

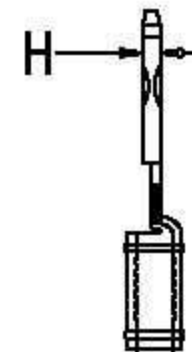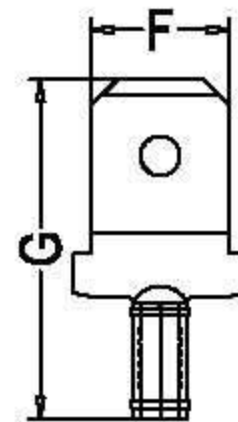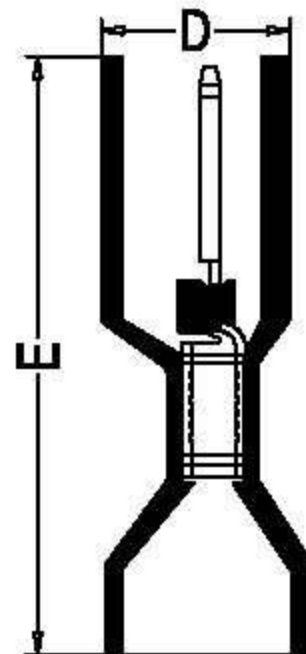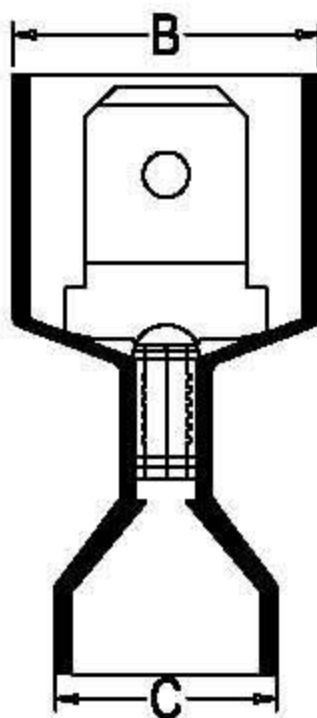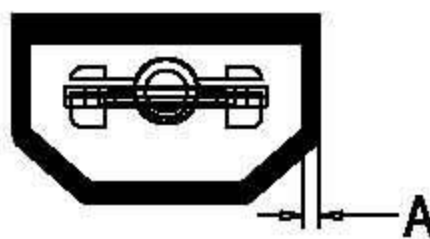

Blind hole type

Through hole type

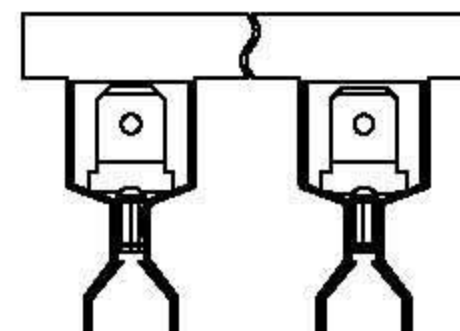

Ordering information and dimensions

187#	Part NO.	A	B	C	D	E	F	G	H	Wire Size	Ins.Dia.max
	M6351FN(S)-8(5)-b1	0.75	10.60	8.30	6.70	22.50	6.30	14.00	0.50	AWG#16~#14	6.60mm
M6351FN(S)-8(5)-b1(A)	0.75	10.60	8.30	6.70	22.50	6.30	14.00	0.50	AWG#16~#14	6.60mm	
M6351FN(S)-8(5)-b	0.78	10.60	6.00	6.70	20.30	6.30	14.00	0.50	AWG#16~#14	4.06mm	
M6351FN(S)-8(5)-b(A)	0.78	10.60	6.00	6.70	20.30	6.30	14.00	0.50	AWG#16~#14	4.06mm	
M6351FN(S)-8(8)-b	0.78	10.60	6.00	6.70	20.30	6.30	14.00	0.80	AWG#16~#14	4.06mm	
M6351FN(S)-8(5)-b(A)	0.78	10.60	6.00	6.70	20.30	6.30	14.00	0.80	AWG#16~#14	4.06mm	
M6351FN(S)-8(5)-R	0.78	10.60	5.10	6.70	20.30	6.30	14.00	0.50	AWG#22~#18	3.05mm	
M6351FN(S)-8(5)-R(A)	0.78	10.60	5.10	6.70	20.30	6.30	14.00	0.50	AWG#22~#18	3.05mm	
M6351FN(S)-8(5)-R1(A)	0.78	12.30	7.30	7.50	23.70	6.30	15.60	0.50	AWG#22~#18	5.84mm	
M6351FN(S)-8(8)-R1(A)	0.78	12.30	7.30	7.50	23.70	6.30	15.60	0.50	AWG#22~#18	5.84mm	
M6351FN(S)-8(8)-R	0.78	10.60	5.10	6.70	20.30	6.30	14.00	0.80	AWG#22~#18	3.05mm	
M6351FN(S)-8(8)-R(A)	0.78	10.60	5.10	6.70	20.30	6.30	14.00	0.80	AWG#22~#18	3.05mm	

